

# XP2i

It's **not** like **other**  
pressure gauges



# Stronger. Tougher. Better.

## Dropped, Submerged, Over-Pressurized and it **still** reads accurately!



### Submersible:

Sealed against dust and water. IP67 certified for 30 minutes of full submersion under 1 meter (3 ft.) of water.


### Shock Resistant:

Survives falls with no affect on accuracy.  
(Can your gauges do that?)



### Marine-Grade Construction:

The patented XP2i's, nickel-plated housing resists corrosion with the same low-copper, aluminum alloy found on saltwater outboard motors.

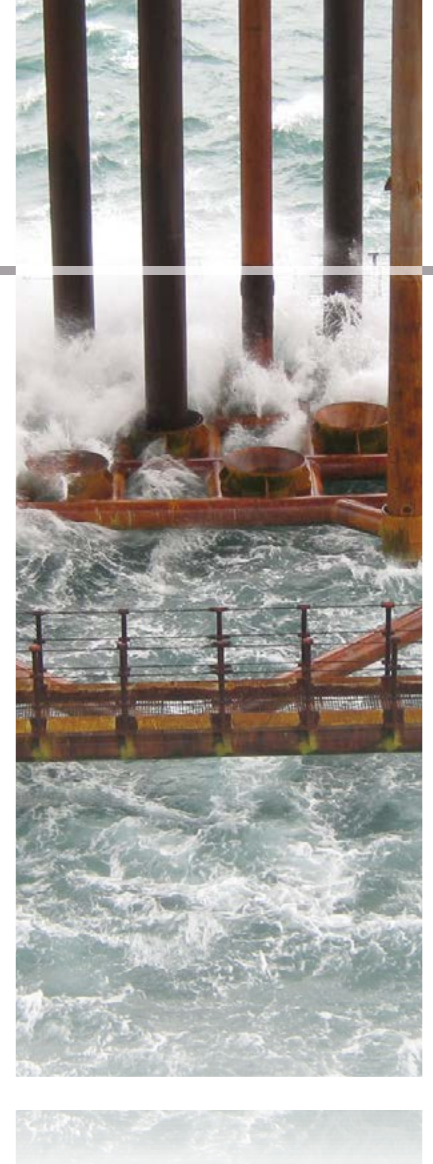

## Would you know if your gauge was broken?

Some sensors and bourdon gauges read incorrectly after deforming under pressure. You would never know your gauge is broken until you compare it to a reference.

The XP2i's silicon sensors shatter at very high pressure, *but never deform*. They always return to their original shape *and accuracy*, even after accidental overpressure. Sensor self-diagnostics will not allow operation if the sensor is damaged.

# Always Accurate



## The Same Accuracy at Any Temperature



Active Digital Temperature Compensation corrects sensor for changes in temperature. We guarantee 0.1% of reading accuracy from -10 to 50° C.

## Higher Accuracy at Any Pressure



With the XP2i's "of reading" specs, your accuracy is always better than a 0.1% "of span" gauge, at any pressure under full scale.

*Plus, you can carry less gear.*

## Easy to Calculate 4:1 Calibration Ratios



Check the fine print in other test gauge specs—you will find small uncertainty adders that overwhelm the basic accuracy, even under conditions you work in every day.

With the XP2i's 0.1% of reading accuracy, your TUR is easy to calculate for devices rated down to 20% of the XP2i's full scale.

## Calibration Certificate Included (Free!)




Every XP2i comes with an ISO 17025 calibration report—NIST-traceable, A2LA accredited, internationally recognized by ILAC—with test data at 5 temperatures, proving our gauges meet specifications throughout their full temperature range. Other manufacturers *charge extra* for a report with data only at room temperature.

**CARRY LESS**  
**Save Money**

### One XP2i Replaces 3 (or More) Test Gauges

Every XP2i maintains its accuracy across a wide pressure and temperature range, so using one XP2i is like carrying multiple conventional gauges. PLUS: You save on next year's calibration costs—whether calibrating an XP2i or a single test gauge, the costs are about the same.

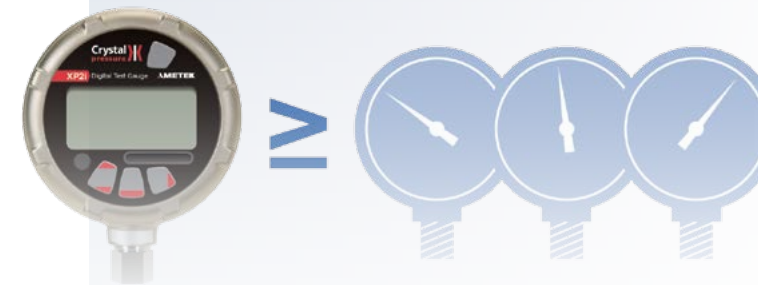

# Intrinsically Safe Recorder

## Now Record up to 32 000 Data Points

When you purchase DataLoggerXP, you transform your XP2i into a portable pressure data logger. Leave your XP2i on location as it records and timestamps readings for months at a time. Start and stop recording with a single button, record multiple data sets, or take individual readings.

XP2i logs pressure at intervals down to 1 reading per second in a number of ways such as Actual Pressure, Average Pressure, or Average Pressure with Peak Hi and Low values.

### DataLoggerXP is Ideal For:

- Pipeline leak testing
- Wellhead monitoring
- Chart recorder replacement
- Diagnostics—capture intermittent or transient events  
...and many more

### Saves You Time:


- Easy to use
- Output to pre-formatted Microsoft® Excel spreadsheets
- Change logging parameters directly from the keypad
- Install on additional computers at no extra cost

### Extended battery life for long-term recordings.

- Record up to **1 YEAR** with Ultra-Low Power mode

### Now available on a Dual Line Display gauge

- See the number of remaining datapoints and live pressure on the same display.

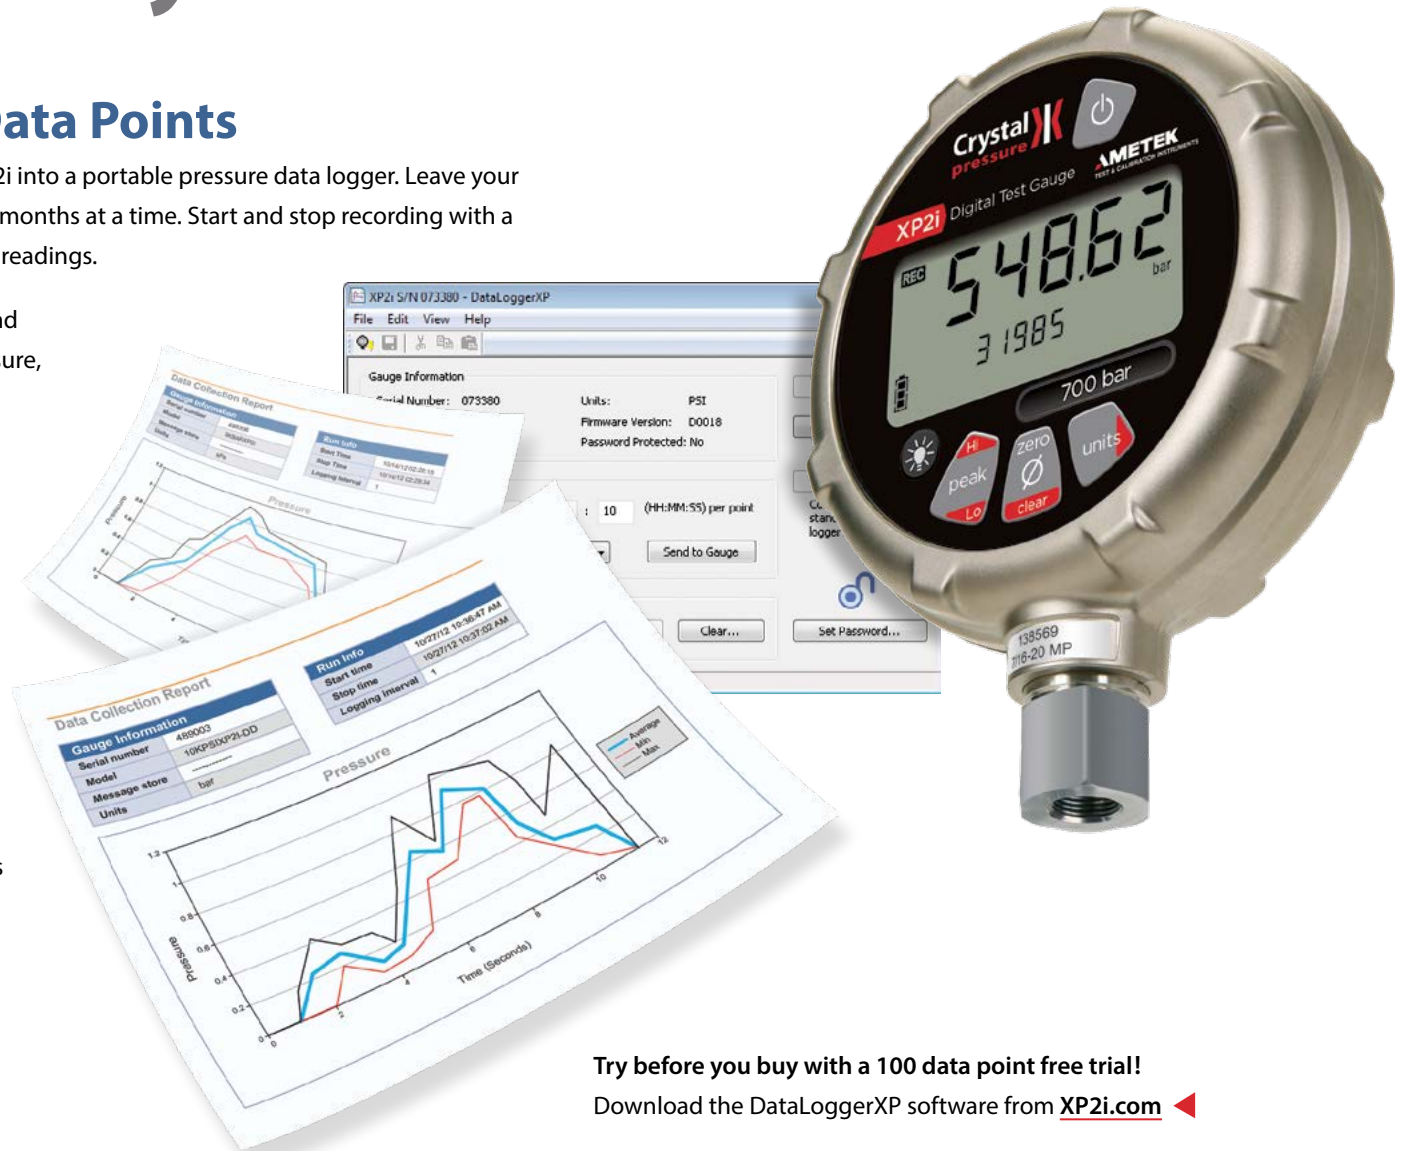

Try before you buy with a 100 data point free trial!

Download the DataLoggerXP software from [XP2i.com](http://XP2i.com) ◀

# Special Functions



**Crystal**  
pressure

## Pressure Safety Valve Test



No more guess work. Simply enable this feature to increase your read rate to 8 times per second. XP2i captures and displays the relief pressure even if you're not looking at the gauge when the valve opens.

## Leak Rate



On the Dual Line Display (-DD Model), view Leak Rate and Live Pressure at the same time.

## Custom Units



Define custom pressure units with **ConfigXP**.  
For example, you can define feet of seawater, tank level, or any torque (N-m or ft-lbs).

**ACTIVATE ONLY**

**The Features You Need**

**Simplify** your XP2i with ConfigXP software by selecting only the functions you use. ([ConfigXP is free at XP2i.com](http://ConfigXP.is.free.at.XP2i.com)) Store multiple configurations on your computer, or set all your XP2i gauges to work the same way.

### Using ConfigXP with your XP2i you can:


- Enable only the units you use, or add custom units you need (for example: feet of seawater)
- Disable any button (except for Power and Backlight)
- Build and load task-specific configurations from your PC
- Copy a configuration to several gauges
- Password-protect to prevent changes
- And more...

# Easy to Use

## No Menus. No Manual. No Problem.

Three buttons — that's all you need to operate the XP2i.

Understand every function two minutes after opening the box.

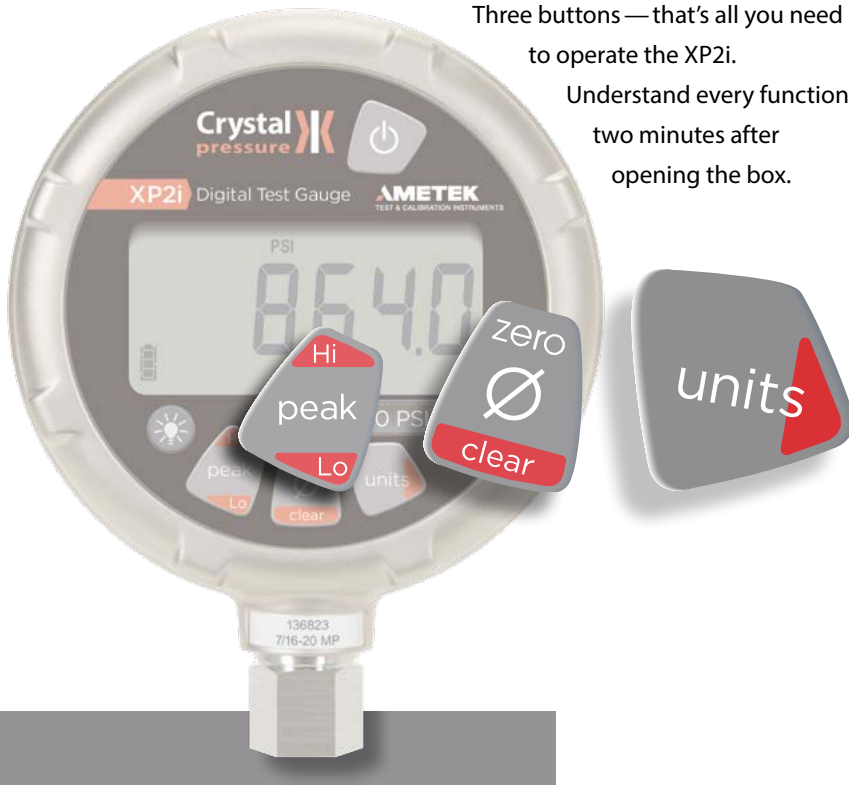

FITTINGS FOR LiFE™

## Removable CPF Adapter

Shifts everyday wear to a replaceable NPT, M20, or BSP adapter (included).

For more information about CPF visit [crystalengineering.net/cpf](http://crystalengineering.net/cpf)

## You Can Read This Display Anywhere

- ▶ Large Display: Read From a Distance
- ▶ High Contrast Liquid Crystal: Read in Bright Sunlight
- ▶ Bright Backlight: Read in the Dark



# Used Everywhere

## Trust Every Reading



### Consistent Performance in the Coldest Places on Earth Northern Canada

In northern Canada, our customers perform hydrostatic testing during winter, when pipelines become accessible by snowcat. They count on the XP2i to be accurate and ready for work when they get there.



### XP2i Proves Itself Middle East

Oil workers on Middle East pipelines operate every day in the blowing sand, under the hot desert sun. They need a reliable, Intrinsically Safe pressure gauge that works as hard as they do. From pressure testing and equipment calibration to long-term recording, they choose the XP2i.




### For Calibration Technicians with No Time to Waste Nuclear Power

Nuclear power technicians have limited time for testing, and no time for mistakes. They need an accurate, simple measuring tool that can be configured to specific tasks. XP2i is trusted in more nuclear power stations than any other similar product.



### When the Right Tool Matters North Sea

Equipment on North Sea platforms must endure harsh conditions. Not only do their gauges have to withstand extreme weather and saltwater spray—they have to be accurate. XP2i is the obvious choice.

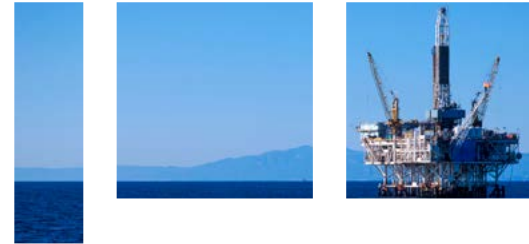

**Crystal**  
pressure



**AMETEK**  
TEST & CALIBRATION INSTRUMENTS



Crystal Engineering Corporation  
708 Fiero Lane, Suite 9, San Luis Obispo, CA 93401, USA  
Telephone: +1 805.595.5477 | Fax: +1 805.595.5466

Dear Pressure Gauge User,

Would you like to know exactly what makes such a significant difference when you use an XP2i? Have a look, and decide for yourself whether testing one in your operation is worth your time.

#### Typical Customer Experiences

##### A Quality Product

*"We purchased three XP2i gauges, 18 months ago, because our mechanical test gauges kept breaking. We have been using our XP2i gauges ever since they arrived, without any problems."*

##### A Broad Operating Range

*"The first thing I noticed about the XP2i was the broad pressure range. I replaced 3 mechanical gauges. My technicians really appreciated carrying just one gauge instead of the three they were accustomed to."*

##### Lower Cost of Ownership

*"A few months ago, I was pleasantly surprised. The cost to recertify each XP2i was 1/3 of what I would pay for the 3 mechanical gauges we used before. And these XP2i gauges are so sturdy they hardly show any signs of wear. I expect them to last another 4-5 years, at least."*

##### Training Made Easy

*"Last week, I hired a new technician. I configured his XP2i with only the functions he needed, so it took us only 5 minutes to train him and he was ready to go."*

##### A Remarkable Difference

*"The time and money we saved with the XP2i is truly remarkable. Over the next year, I intend to replace all our gauges with XP2i gauges. They have made a tremendous difference for us."*

We want you to know this experience is **typical** for our customers. At every tradeshow we attend, customers tell us about how the XP2i has improved the way they operate.

##### Try it For Yourself – FREE

You can try out an XP2i at your facility, for free. Simply ask one of our Crystal salespeople about your free demonstration unit, today. We're betting when your trial period ends, you won't want to send it back.

Sincerely,

The Crystal Team

## Safe & Reliable in Hazardous Environments

Every XP2i is certified Intrinsically Safe.



II 1G Ex ia IIC T4/T3 Ga  
FTZU 12 ATEX 0048X

This product conforms to the following standards:

EN 60079-0: 2009 | EN 60079-11: 2012 | EN 60079-26: 2007



Ex ia IIC T4/T3 Ga  
IECEx FTZU 12.0009X

This product conforms to the following standards:

IEC 60079-0: 2011 | IEC 60079-11: 2011-06 | IEC 60079-26: 2006



Intrinsically Safe and Non-incendive for Hazardous Locations:  
Class I, Division 1, Groups A, B, C and D, Temperature Code T3C  
or T4/T3C. Maximum working pressure 15 000 psi.



Crystal products include a factory calibration report that proves it meets its specifications over the operating temperature range. The products described herein, are calibrated in Crystal's accredited Calibration Lab (A2LA, Certificate #2601.01 ISO/IEC 17025) in an environmental chamber using fully automated equipment. Inclusion of the ILAC-MRA symbol does not imply certification or approval of the product itself, but rather refers to Crystal's accreditation as a calibration facility.

For detailed specifications  
go to the Data Sheet at [XP2i.com](http://XP2i.com)



No part of this document may be reproduced or modified in any form or by any means, electronic or mechanical, without express written permission from Crystal Engineering Corporation.

© 2013 Crystal Engineering Corporation

