

ACCURACY—PRESSURE MEASUREMENT

- 0 to 110% of Range: **±(0.05% of Reading + Floor Term)**
- Floor Term: **0.005% of FS or display resolution, whichever is greater**
- Vacuum: **±(0.25% of Reading + Vacuum Floor Term)**
- Vacuum Floor Term: **0.0003 bar for 1 and 2 bar**
0.001 bar for 20 bar

Includes all effects of linearity, hysteresis, repeatability, temperature, and stability for one year.

All models indicate vacuum, but vacuum specification applies to 1 bar, 2 bar, and 20 bar models only.

Not recommended for continuous use below -1 bar. Refer to [XP2i-DP data sheet](#) for gauges that are intended for continuous high vacuum use.

ACCURACY—MILLIAMPERES

- Accuracy: **±(0.025% of Reading + 0.001 mA)**
- Range: **0 to 55 mA**
- Resolution: **0.001 mA**
- Connection: **4 mm jacks, 19 mm (0.75") spacing**

Includes all effects of linearity, hysteresis, repeatability, temperature, and stability for one year.

mA can be displayed as a percentage, where 0 to 100% corresponds to either 4 to 20 mA or 10 to 50 mA.

Jacks are compatible with safety sheathed banana plugs.

OPERATING TEMPERATURE

- Temperature Range: **0 to 50° C (32 to 122° F)**

Non-condensing. No change in accuracy over operating temperature range. Gauge must be zeroed to achieve rated specification.

DISPLAY

- Screen: **2 lines of up to 6 digits, 5 mm (0.2") high**
- Display Rate: **2 readings/second (Adjustable to 1, 3, or 3.7 readings/second)**

LCD readable in sunlight.

Changes to reading rate requires software: ConfigM30 is a free download from crystalengineering.net/downloads/30series.

POWER

- 1 x 9V: **90 hours, typical**

Uses one alkaline 9V battery. Use of USB interface reduces operating time.


WARNING: Do not use USB in hazardous locations.

DATA/COMMUNICATION

- Digital Interface: **micro-USB**

Free Labview drivers available online.

WARNING: Do not use USB in hazardous locations.

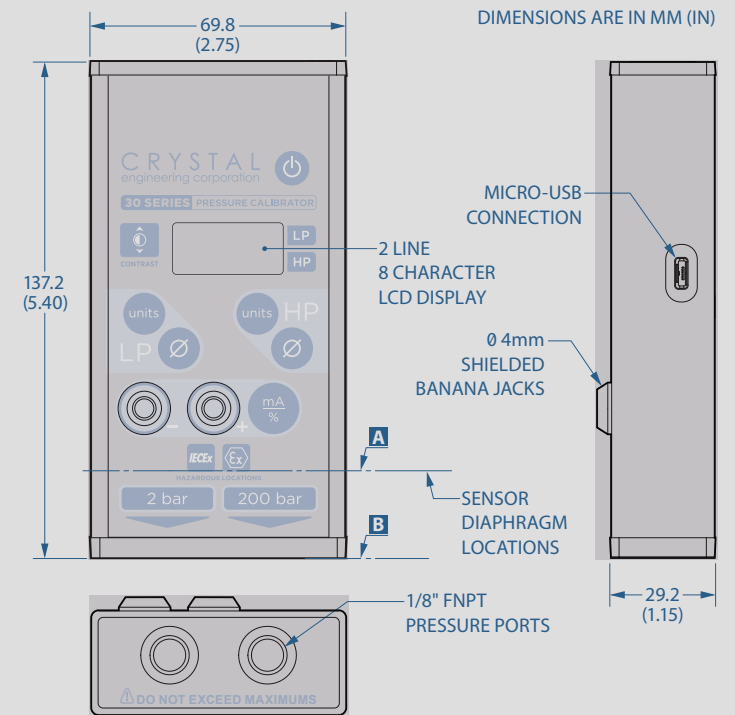

PRESSURE PORT VOLUMETRIC DATA:

- LP distance to diaphragm (**A** to **B**): 22.4 (0.88")
- LP volume: 2 ml (0.13 cubic inches)
- HP distance to diaphragm (**A** to **B**): 17.8 (0.70")
- HP volume: 1 ml (0.06 cubic inches)

ENCLOSURE

Model 31 ≤ 20 bar:	342 g (12.0 oz)	<i>Weight includes batteries.</i>
* Model 31 ≤ 20 bar:	428 g (15.0 oz)	<i>*SPSS optional manifold.</i>
Model 31 ≥ 100 bar:	360 g (13.0 oz)	<i>Nylon carry case included.</i>
Model 33:	400 g (14.0 oz)	
* Model 33:	485 g (17.0 oz)	
Housing:	Extruded aluminum	
Keypad and Labels:	UV resistant polyester	

SENSOR ≥ 100 bar

Wetted Materials:	316 stainless steel	<i>All welded with a permanently filled diaphragm seal.</i>
Diaphragm Seal Fluid:	Dow Corning® 200	
Connection:	Bottom, 1/8" female NPT	

SENSOR ≤ 20 bar

Wetted Materials:	316 stainless steel, Viton® (o-ring)	<i>Viton o-ring is internal.</i>
	Anodized aluminum penetrated with PTFE (polytetrafluoroethylene)	<i>All welded with a permanently filled diaphragm seal.</i>
Diaphragm Seal Fluid:	Dow Corning® 200	
Connection:	Bottom, 1/8" female NPT	

STORAGE TEMPERATURE

Temperature Range:	-20 to 70° C (-4 to 158° F)	<i>Batteries should be removed if stored for more than one month.</i>
--------------------	------------------------------------	-----------------------------------------------------------------------

SPECIAL FEATURES

The following requires the use of **ConfigM30** software

- User Defined Unit: **Allows the user to define and display any pressure units not included, or to use the gauge to display force, level, or other pressure related parameters. Reduce or increase displayed resolution.**
- Remove: **Unwanted pressure units from Units button.**
- Password Protect: **Changes to configuration or userspan calibration factor(s).**
 - Save: **Configuration to a file.**
 - Copy: **Configuration to other calibrators.**

CERTIFICATIONS



**II 2G Ex ia IIC T4
FTZU 06 ATEX 0010 X**

This product conforms to:
EN 60079-0: 2006 | EN 60079-11: 2007



**II 2G Ex ia IIC T4 Gb
IECEx FTZU 10.0018 X**

This product conforms to:
IEC 60079-0: 2007 | IEC 60079-11: 2006



30 Series complies with the Electromagnetic Compatibility and the Pressure Equipment Directives. Refer to the EC Declaration of Conformity for specific details.



The instrument was tested against **AS/NZS 3584**, C-tick EMC/EMI requirements.



30 Series is approved for use as a portable test instrument for Marine use and complies with Det Norsjke Veritas' Rules for Classification of Ships, High Speed & Light Craft and Offshore Standards.

RANGE & RESOLUTION TABLES

P/N	Range (bar)	Over-pressure	Display Resolution										
			bar	mbar	kPa	MPa	PSI	in H ₂ O	in Hg	mm Hg	mm H ₂ O	cm H ₂ O	kg/cm ²
1	1	6.5 x	0.0001	0.1	0.01		0.001	0.01		0.01	1		0.0001
2	2	3.0 x	0.0001	0.1	0.01		0.001	0.01		0.01	1		0.0001
20	20	2.0 x	0.001		0.1		0.01	0.1	0.01	0.1		1	0.001
100	100	2.0 x	0.01		1	0.001	0.1						0.01
200	200	1.5 x	0.01		1	0.001	0.1						0.01
300	● 300	1.5 x	0.01		1	0.001	0.1						0.01

● Model 31 calibrators are not available in these ranges.

		Second Pressure Ranges			
		20 bar	100 bar	200 bar	300 bar
First Pressure Ranges	1 bar	■	■	■	■
	2 bar	■	■	■	■
	20 bar		■	■	

Model 33 calibrators have dual pressure sensors. This chart shows all of the available sensor combinations. ■

ORDERING INFORMATION

Intrinsic Safety	Model	Sensor(s)	1st Pressure Range P/N	2nd Pressure Range P/N	Pressure Unit	Manifold
IS	3	_____	_____	_____	_____	_____
		Single Sensor: 1				Standard: (omit)
		Dual Sensor: 3				Stainless Steel: SPSS

SAMPLE PART NUMBERS

- IS31-2BAR Calibrator with one sensor (2 bar)
- IS33-2/200BAR Calibrator with two sensors (2 bar and 200 bar)
- IS33-1/100BAR-SPSS Calibrator with two sensors (1 bar and 100 bar) with two stainless steel manifolds


*.BAR versions available in USA direct from factory only.

ACCESSORIES



Carry Case and Strap P/N 2490 (included)

A clear plastic cover protects the keypad while allowing operation of all the buttons.



Test Leads P/N 1351

Our test lead kit features high quality banana to banana test leads with rugged, hard plastic insulated alligator clips.

COMPLIMENTARY PRODUCTS

Crystal Engineering offers a wide range of products that work with the XP2i:

- Fittings that connect without tools, safely and without leaks
- Lightweight, super flexible high pressure hoses
- Fitting kits and adapters
- Pneumatic hand pumps
- Hydraulic hand pumps
- Portable pressure comparators
- Software, for the quickest way to calibrate pressure transmitters and gauges

Dow Corning is a registered trademark of Dow Corning Corporation.

Viton is a registered trademark of DuPont Performance Elastomers.